




T-образная радиусная

форма
DD

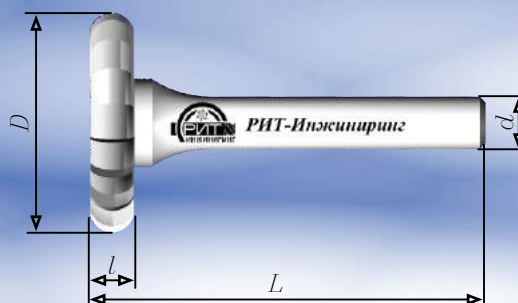

D	l	d	L		C	M	F
14	2.5	6	47.5				
16	3	6	48		BCDD140(2.5)6N	BMDD140(2.5)6N	BFDD140(2.5)6N
16	3	6	48		BCDD160(3)6N	BMDD160(3)6N	BFDD160(3)6N
25	3.5	6	48.5		BCDD250(3.5)6N	BMDD250(3.5)6N	BFDD250(3.5)6N
25	6	6	51		BCDD250(6)6N	BMDD250(6)6N	BFDD250(6)6N
25	6.5	6	51.5		BCDD250(6.5)6N	BMDD250(6.5)6N	BFDD250(6.5)6N

T-образная радиусная

форма
DD

упрочняющее покрытие

Технологические
покрытия



D	l	d	L		C	M	F
14	2.5	6	47.5				
14	2.5	6	47.5		BCDD140(2.5)6NP	BMDD140(2.5)6NP	BFDD140(2.5)6NP
16	3	6	48		BCDD160(3)6NP	BMDD160(3)6NP	BFDD160(3)6NP
25	3.5	6	48.5		BCDD250(3.5)6NP	BMDD250(3.5)6NP	BFDD250(3.5)6NP
25	6	6	51		BCDD250(6)6NP	BMDD250(6)6NP	BFDD250(6)6NP
25	6.5	6	51.5		BCDD250(6.5)6NP	BMDD250(6.5)6NP	BFDD250(6.5)6NP

* при заказе символ P (в маркировке) заменить на соответствующее обозначение покрытия (B, Y, C)