
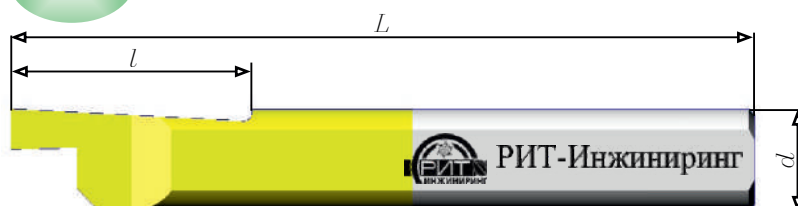
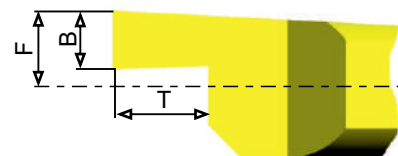


Обработка торцевой прямоугольной канавки - серия РТ

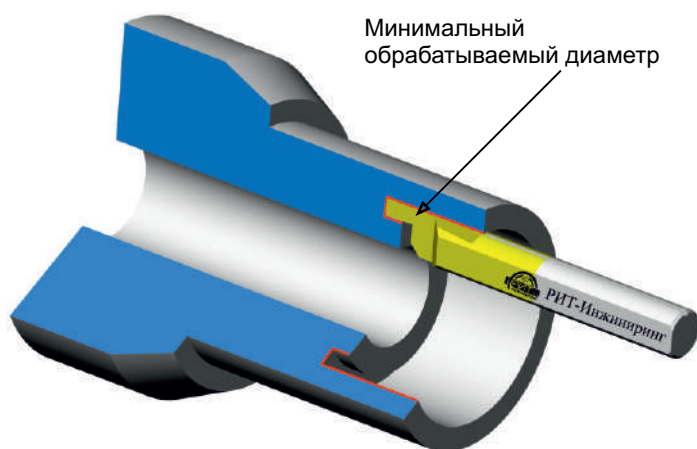

Минимально обрабатываемый диаметр	Обозначение	Параметры инструмента					
		dh6	L	l	B	T	F
5.0	CL-PT-5.0-15-4-47-B0.75-D	4.0	47	15	0.75	1.2	1.9
5.0	CL-PT-5.0-15-4-47-B1.0-D	4.0	47	15	1.0	1.5	1.9
5.0	CL-PT-5.0-15-4-47-B1.5-D	4.0	47	15	1.5	2.8	1.9
6.0	CL-PT-6.0-22-5-47-B0.75-D	5.0	47	22	0.75	1.2	2.4
6.0	CL-PT-6.0-22-5-47-B1.0-D	5.0	47	22	1.0	1.5	2.4
6.0	CL-PT-6.0-22-5-47-B1.5-D	5.0	47	22	1.5	2.5	2.4
6.0	CL-PT-6.0-22-5-47-B2.0-D	5.0	47	22	2.0	3.8	2.4
8.0	CL-PT-8.0-22-6-47-B1.0-D	6.0	47	22	1.0	1.5	2.9
8.0	CL-PT-8.0-22-6-47-B1.5-D	6.0	47	22	1.5	2.5	2.9
8.0	CL-PT-8.0-22-6-47-B2.0-D	6.0	47	22	2.0	3.0	2.9
8.0	CL-PT-8.0-22-6-47-B2.5-D	6.0	47	22	2.5	4.8	2.9
8.0	CL-PT-8.0-30-6-64-B3.0-D	6.0	64	30	3.0	6.0	2.9
10.0	CL-PT-10.0-25-8-64-B2.5-D	8.0	64	25	2.5	3.5	3.9