




Обработка прямоугольной канавки - серия РК

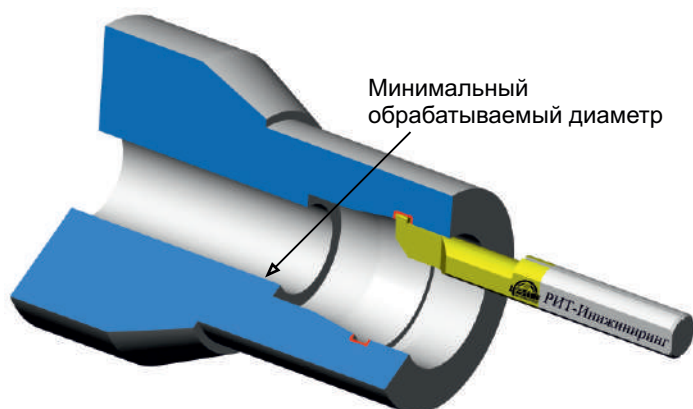

Обработка прямоугольной канавки
РК
Серия

Направление резания
L
Правое

Тип хвостовика
D
Стержень

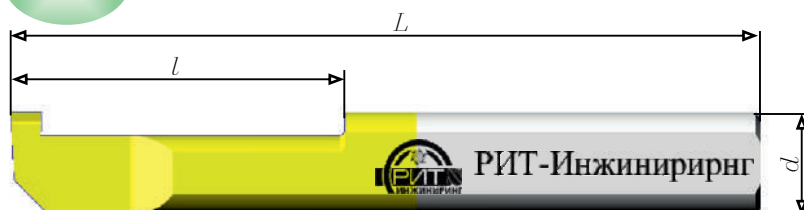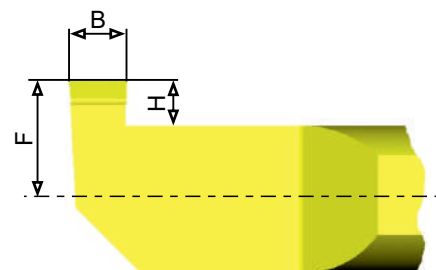

Минимально обрабатываемый диаметр	Обозначение	Параметры инструмента					
		dh6	L	l	B	H	F
3.1	CL-PK-3.1-10-3-35-D	3.0	35	10	0.7	0.6	1.3
4.1	CL-PK-4.1-10-4-47-B0.7-D	4.0	47	10	1.0	1.0	1.7
4.1	CL-PK-4.1-10-4-47-B1.0-D	4.0	47	10	0.1	0.8	1.6
5.1	CL-PK-5.1-15-5-47-B1.0-D	5.0	47	15	1.0	1.2	2.3
5.1	CL-PK-5.1-15-5-47-B1.5-D	5.0	47	15	1.5	1.2	2.3
5.1	CL-PK-5.1-15-5-47-B2.0-D	5.0	47	15	2.0	1.2	2.3
6.1	CL-PK-6.1-15-6-47-B1.0-D	6.0	47	15	1.0	1.4	2.8
6.1	CL-PK-6.1-15-6-47-B1.5-D	6.0	47	15	1.5	1.4	2.8
6.1	CL-PK-6.1-15-6-47-B2.0-D	6.0	47	15	2.0	1.4	2.8
8.1	CL-PK-8.1-22-8-64-B1.0-D	8.0	64	22	1.0	1.7	3.8
8.1	CL-PK-8.1-22-8-64-B1.5-D	8.0	64	22	1.5	1.7	3.8
8.1	CL-PK-8.1-22-8-64-B2.0-D	8.0	64	22	2.0	1.7	3.8